










 **SOLARLUX®**

Solarlux SL25XXL

slide and turn system

Solarlux SL25XXL Slide and Turn System

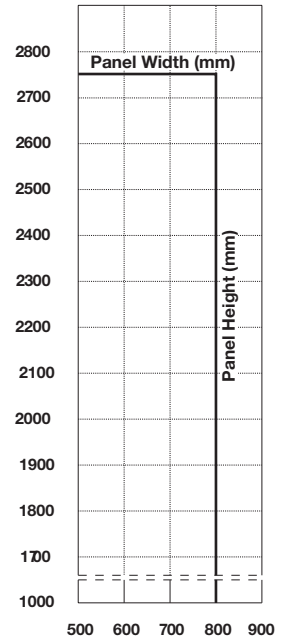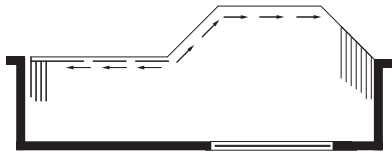

Floor Tracks

Configuration Variants

Panel Size Chart



Engineered

Horizontal twin ball bearing runner devices with 65 kg bearing load so that panels can be slid open extremely smoothly.




Glass Thickness

Glazing with single pane safety glass with a thickness from 10 to 15 mm. Highest security for high-rise buildings.



Transparency

No vertical panel profiles, thus unobstructed view.

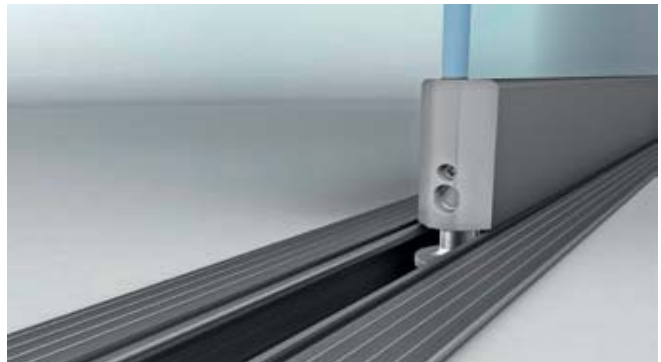

Floor Track

Flush floor track without upstand available for barrier free access. No trip hazard.

Solarlux SL25XXL Slide and Turn System

Applications

- Balcony glazing / façades
- Room dividers
- Glass canopy/Glass house
- Alfresco areas
- Shopfronts

Variants

- Available as top hung construction
- Can be made to slide to the left or to the right
- Can be stacked inward or outward

Glazing

- Glazing with single pane safety glass
- Glass thickness: 10, 12 and 15 mm available

Maximum Panel Sizes

- 800 x 2750 mm
- Special sizes on request
- The total element width is unlimited

Surface Finish

- Powder coating
- Anodised aluminium

Fittings

- No Protruding runner and guide tracks
- Concealed fittings for one hand operation
- Integrated 2-step locking
- Patented one handed operation by means of stainless steel cable control
- Extensive layout options thanks to mobile carriage which can be manoeuvred through all angles 90° - 180°
- No parking station tracks for panels required

Profile System

- Element thickness 31 mm
- Frameless glass slide and turn system
- In-line support, no vertical profile, resists driving rain



Height Adjustment

Height compensation section to absorb tolerances of up to 35 mm (even after installation).



Ventilation

Lockable two step trickle ventilation for controlled ventilation (optional).



Knob Grip

Turning sash equipped with knob grip for easy internal and external operations (optional).



Door Handle

Lockable all glass door handle in stainless steel appearance (optional).